

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/020120 A2

-
- (51) International Patent Classification⁷: G06F 19/00 (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/IB2004/002629
- (22) International Filing Date: 6 August 2004 (06.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/496,418 20 August 2003 (20.08.2003) US
- (71) Applicant (*for all designated States except US*): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (71) Applicant (*for AE only*): U.S. PHILIPS CORPORATION [US/US]; 1251 Avenue of the Americas, New York, NY 10510-8001 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): ALI, Walid [EG/US]; 595 Miner Road, Cleveland, OH 44143 (US).
- (74) Common Representative: KONINKLIJKE PHILIPS ELECTRONICS N.V.; c/o LUNDIN, Thomas, M., 595 Miner Road, Cleveland, OH 44143 (US).


Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SYSTEM AND METHOD FOR DETECTING SIGNAL ARTIFACTS

WO 2005/020120 A2

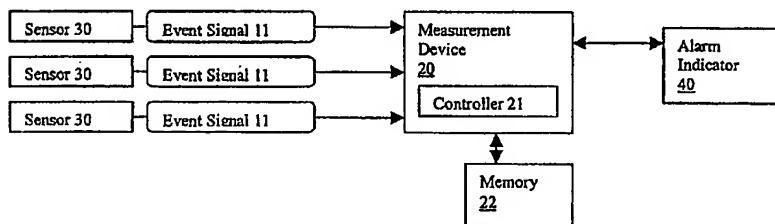

(57) Abstract: A method and system are disclosed that detect signal artifacts in one or more event signals. The system and method may be used with a patient monitoring apparatus that adapts to a patient's condition and distinguishes between clinically significant changes in the patient's state versus clinically insignificant changes.